



QC3 Combined Filling and Dispensing system with Turncock

Application:

The QC-3 system for higher flow rate with two turncock's combines the dispensing and recirculation into one head and through one dip tube.

Features:

- Higher safety by unique contact on the dispense head in the assembly
- Dispensing and filling of liquids in one operation
- Without check-valves
- High flow rate, even with highly viscous chemicals
- Key-coding system

Technical Specification:

- Standard material: HDPE
- O-rings: Perfluorelastomer (Kalrez®), FKM, EPDM
- turncock for filling and dispensing
- QC3 dip-tubes available for S62 and S64 thread sizes, for other please check with AS Strömungstechnik

Dimensions:

- Total height: 25.4cm
- Width: 11.1cm
- Weight: 0.9 kg
- Flow rate up to: 55 L/min
- Connections: Flaretek®
- > dispense port: 3/4"
- > recirculation port: 1/2"
- > air/vent port: 1/4" or 3/8"
- Chemical key coding: 455 options

Option:

Variety of connection types and sizes on request.

Accessories:

Docking station for QC3 System order No.: RDC 89743
Code checker order No.: RDH 89701-03
Universal wrench order No.: RDH 79007

QC3 System Order No.:


DH3-AAK-PE-XXX-F3/4"-F1/2"-F1/4" (Kalrez®)
DH3-AAF-PE-XXX-F3/4"-F1/2"-F1/4" (FPM / FKM-Viton®)
DH3-AAE-PE-XXX-F3/4"-F1/2"-F1/4" (EPDM)



Connections



dip tube thread S62

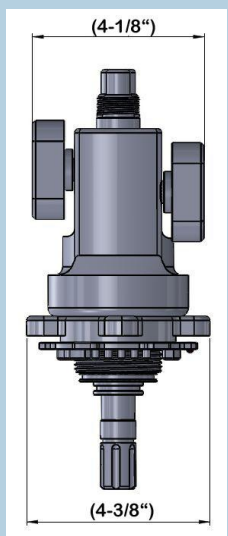

Accessories:



universal wrench



code checker



docking-station