



**Application:**

> The QC-3 system for higher flow rate with two turncock's combines the dispensing and recirculation into one head and through one dip tube.

**Features:**

- Higher safety by unique contact on the dispense head in the assembly
- Dispensing and filling of liquids in one operation
- Without check valves
- Good flow rate, even with highly viscous liquids
- Even more coding options

**Technical Specification:**

- Material Standard: PE
- O-rings: Perfluorelastomer (Kalrez®), FKM, EPDM
- turncock for filling and dispensing
- Only in combination with dip tube thread S62

**Measure, circuit points:**

- Total height: 255 mm
- Height above container top: 170 mm
- Width: 111 mm
- Weight: 850 gr.
- Flow rate up to: 55 liter/min.
- Connections: Flaretek®
- > dispense port: 3/4"
- > recirculation port: 1/2"
- > air/gas port: 1/4" or 3/8"
- Chemical key coding (all parts are in dry area)

**Option:**

Variety of connection types and sizes on request.


**Accessories:**

Docking station for QC3 System order No.: RDC 89743  
Code checker order No.: RDH 89701-03  
Universal wrench order No.: RDH 79007

**QC3 System Order No.:**

DH3-AAK-PE-XXX-F3/4"-F1/2"-F1/4" (Kalrez®)  
DH3-AAF-PE-XXX-F3/4"-F1/2"-F1/4" (FPM / FKM-Viton®)  
DH3-AAE-PE-XXX-F3/4"-F1/2"-F1/4" (EPDM)


**QC3 Combined filling and dispensing system with turncock**



Connections



dip tube thread S62

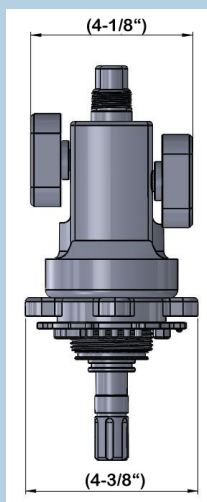

**Accessories:**



universal wrench



code checker



docking station